




# Three Phase Squirrel Cage Induction Motor with DOL Starter Training System

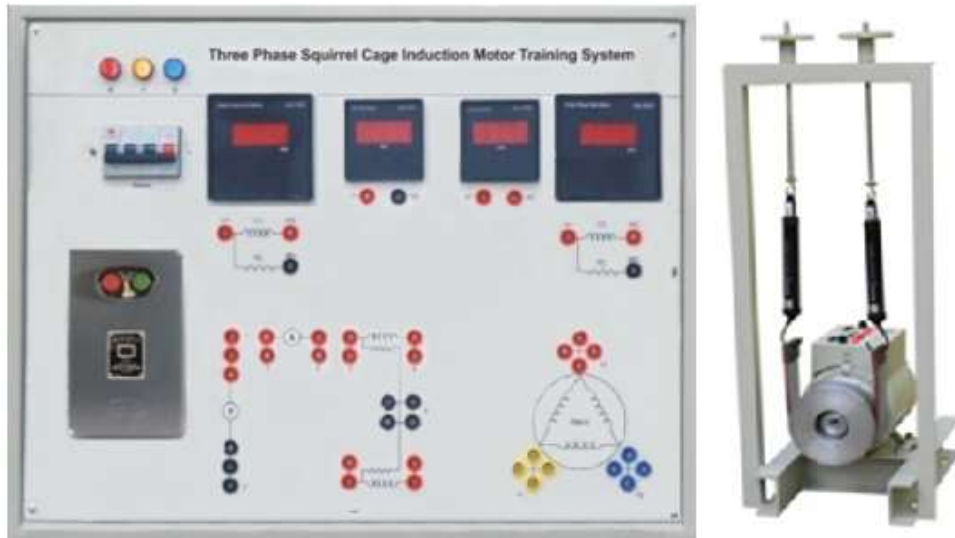

\*\* Shown image is just for illustration original may differ

## Introduction

Three Phase Squirrel Cage Induction Motor with DOL Starter Training System is an adaptable training system for the Electrical laboratories. The product helps you to get fully acquainted with the basic concepts and functioning of a Three Phase squirrel cage Induction Motor.

The trainer practically expertise you in exercises like Running and Reversing, No Load Test, Slip Measurement, Load Test etc. All connections and appearance of panel are designed in a simple manner so that students can make connections by themselves.

## Product Features

- Control with built-in Direct On-Line (DOL) Starter
- Digital microcontroller based measuring devices with high accuracy and resolution
- Control board Consist of MS Material with power coating / Epoxy paint to avoid any rust
- Screen printed symbols, circuit diagrams, graphics or photos wherever requires.
- Designed using standard BS-10 terminal and patch cords for electrical safety
- Machine winding consist of copper for long term service
- Machine with Class "F" Insulation
- Machine with standard mechanical loading structure
- Machine with standard tabular spring balance with zero adjustment facility
- 1.5 mm x 3mm Heavy Duty Base/Channel with facility to concrete machine
- Brake-Drum/Pulley with heat suppression facility inside it
- Provided with non contact Digital speed measuring equipment
- Equipped with supply indicator lamps
- Earthing screw provided at the back side of the control board
- Product supplied with protection fuses, colored patch cords, single phase\ three phase cords, learning manual having theory operating procedure with connecting diagram, FAQ, Glossary, etc

## Technical Specifications

Mains Supply	: 415VAC $\pm$ 10%, 50Hz
DOL Starter	: Siemens or equivalent Make
<b>Three Phase Induction Motor</b>	
Type	: Squirrel Cage
Rating	: 3HP
Voltage Rating	: 415V $\pm$ 10%, 50Hz
Current Rating	: As per standard
Speed	: 1440 RPM $\pm$ 10%
Insulation	: Class 'F'
Duty	: Continuous
Enclosure	: TEFC
Mounting	: Horizontal Foot Mounted
Shaft Extension	: Single Sided
Loading arrangement	: Mechanical
Brake Drum/Pulley	: MS/Aluminum Casted with heat suppression facility inside it
Spring Balance	: 2Nos. (Salter make)
Loading Nut & Bolts	: Brass material
Terminals box	: Epoxy paint with terminals and fuses brought out at the top
Machine Base	: MS "C" Channel with suitable interconnection
<b>Digital Meters used</b>	
AC Wattmeter	: 2 Nos.
AC Voltmeter	: 1 No.
AC Ammeter	: 1 No.
<b>Digital Tachometer</b>	
Range	: 19,999 rpm
Type	: Contact / Non-contact
<b>Protection Devices</b>	
MCB (TPN)	: 1No
Glass Fuse	: 1No
Grounding Nut	: Available at the rear side of the panel

### Experiments Can be performed:

Study about three phase squirrel cage induction motor with following topics.

- Understanding fundamentals and operational working principles of DOL Starter
- Running and reversing phenomenon
- Slip test measurement
- Performance at no-load test and correspondingly calculate equivalent parameters and power factor
- Performance at load condition.

### Supporting Accessories supplied with Product

- Patch Cords of different color scheme
- Single Phase Mains Cord
- Extra Glass Fuses
- Operating Manual (softcopy)
- Digital Tachometer
- 6A, Three Phase Closed Type Autotransformer (**Optional, to conduct block rotor test**)

**\*\*Please feel free to share your queries or requirements by filling your details in ask query section or request a Quote section on the website, we will be happy to cater your requirement.**